


PRODUCT DATA SHEET

Version:15000317

DISABLE TOILET ALARM SYSTEM



DISABLE TOILET ALARM SYSTEM STANDARDS EDITION

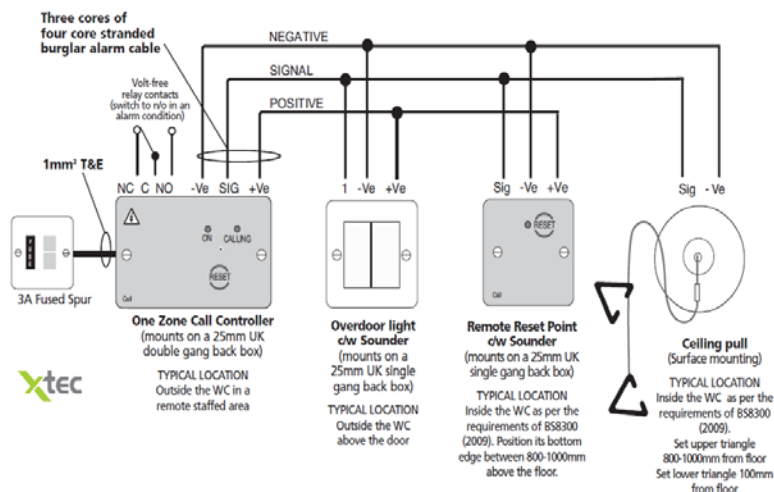

TWO TO FOUR YEARS WARRANTY (*)



Key Features'

Fully conforms to BS8300:2009 requirements

Made in UK

Integral power supply - requires mains power

Monitored battery backup

Powerful LEDs and sounder

Two alarm modes (flashing or steady LEDs)

Up to three ring pulls can be fitted per 'station'

Stainless steel kit available

Approved Document. No. DNS800T101 Rev 12.

STAND ALONE SYSTEM

Controller:

Onboard 12V PSU, a volume adjustable buzzer, a zonal alarm LED (to provide audible and visual indication of a call), a mute/reset button (for silencing or cancelling calls) and a volt-free relay with normally open, closed and common contacts. Mounts on a 25mm UK double gang back box.

PART NO: XT1942B/XT1944

External PSU:

220VAC switched power as supply 12V. Optimal use for four zone controller for larger installation starting from 4 zone's to maximum 90 zone in a single installation.

PART NO: XT1930

Remote Reset

Designed for use alongside the WC, allows calls generated by the ceiling pull to be cancelled at source, i.e. inside the WC. It also features an on-board reassurance LED and sounder (to provide audible and visual indication of an alarm call inside the WC and to help reassure users that help is on its way). Like the call controller, the reset point's label includes Braille text for ease of use by the visually impaired.

PART NO: XT1809D

Ceiling Pull

Ceiling Pull incorporating a red confidence indicator (to reassure the user that a call has been made), a 3m cord and two red triangular pull bangles, specially designed for ease of use by the infirm. Note, for applications requiring more than one point of call (for example at the WC and the wash basin), up to three ceiling pulls can be daisy chained together.

PART NO: XT1807C

Light with Sounder

Used to provide additional audible and visual indication of an alarm call outside the WC, the XT06CS features a series of ultra-bright LEDs in a triangular shaped diffuser making it highly visible from a distance. Located directly outside the WC above door

PART NO: XT1806C

WC Sticker

Disabled WC Sticker, gloss finished in permanent vinyl featuring the universally recognizable Disabled WC symbol.

PART NO: XT1949


Interface

Disable system had bulletin NO/NC/C interface to interface with 3rd parties systems.

PRODUCT DATA SHEET

Version:15000317

DISABLE TOILET ALARM SYSTEM

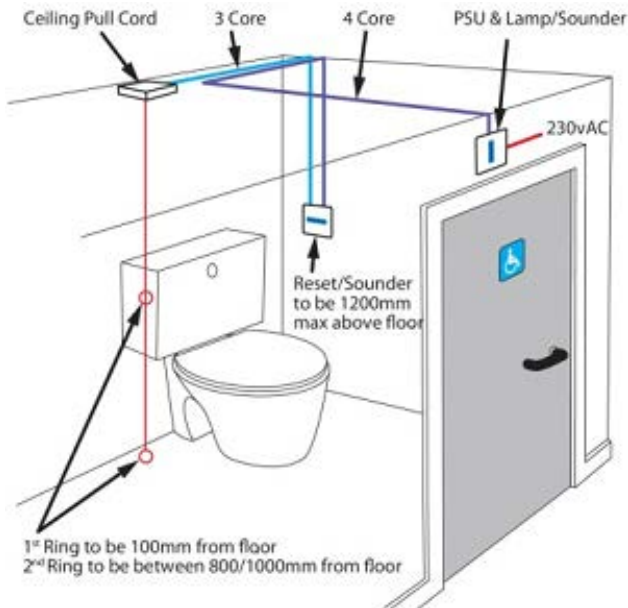


ALARM SYSTEM

- Can be installed single zone as a single system
- Can be installed 4-zone as a single system
- Series of zone controller can be connected (90 Zone MAX)
- Alarm Indicator panel can be installed for monitoring

X-TEC's Disabled toilet alarm includes everything required for a BS8300 clause compliant emergency assistance alarm. Attractively designed and simple to use, it allows a distressed person to raise an alarm in the event of an emergency. To operate, the user simply pulls the cord of a ceiling pull unit to activate a light and sounder outside the calling room.

Ideal for use in all types of disabled persons/accessible toilet applications, the Controller can also be used as a single zone emergency assistance alarm in changing rooms, solariums, accessible bedrooms, interview rooms, reception areas, etc up to a multi zone system using 4-zone controller in a row up to maximum 90-Zones.

EXAMPLE WIRING CONFIGURATIONS & TYPICAL APPLICATIONS FOR OTHER SERIES DEVICES

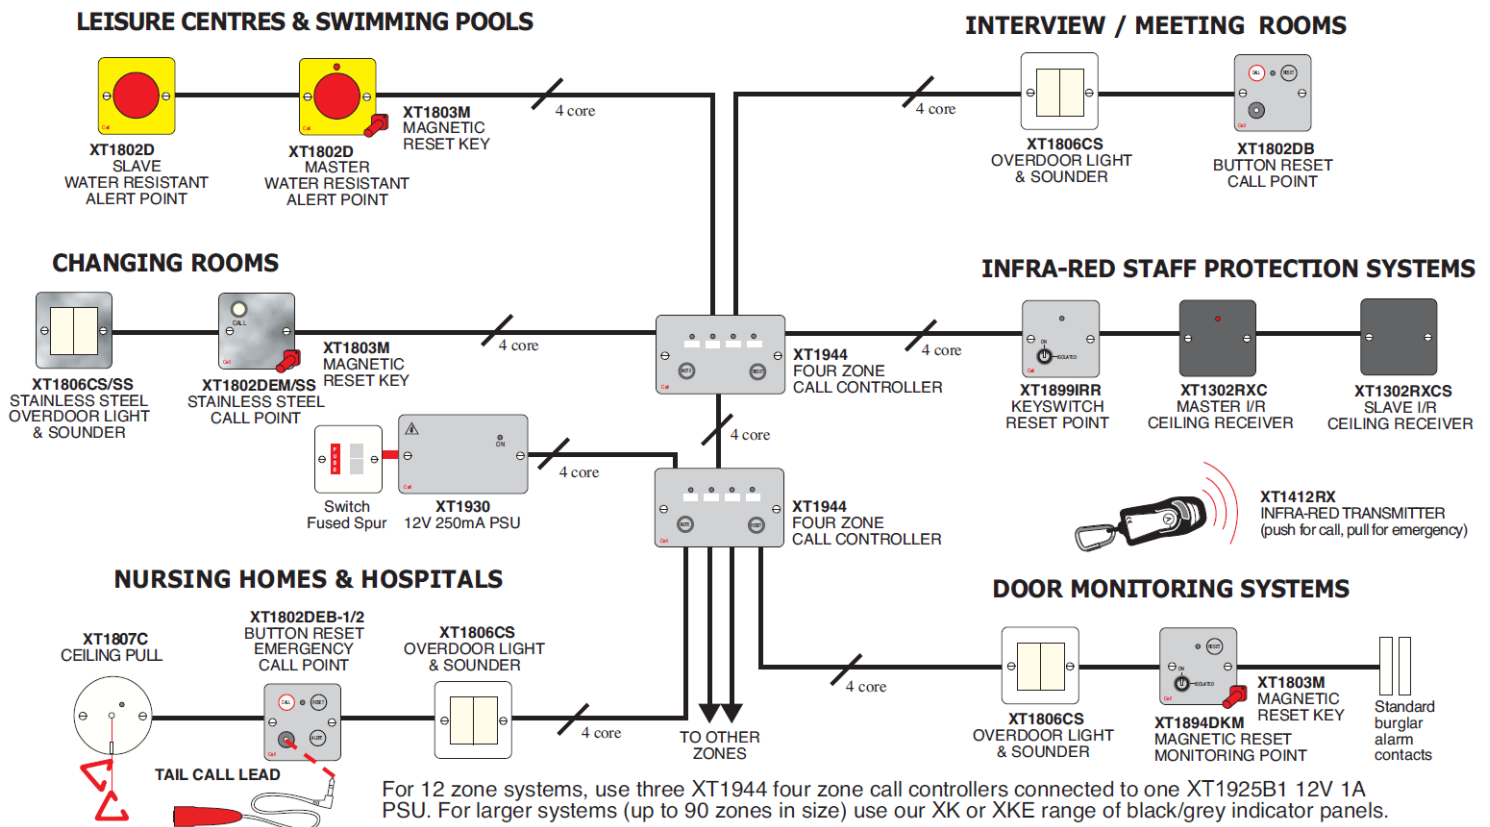

FEATURE'S

Double gang call controller features, Attractive compact design blends perfectly into any sort of décor, Volt-free relay output, a rotary volume control, Braille text and on-board rechargeable battery backup facility, Remote reset point c/w sounder provides audible and visual indication of an alarm call inside the WC to reassure users help is on the way, Simple to install 12V system, four core stranded security cable is ideal for most installations. Ceiling pull features two open sided triangular bangles for ease of use by the infirm, Disabled WC sticker included in All wall-mounting plastic accessories fit 25mm backbones. Ceiling pull is surface mountable. Rechargeable back-up battery

